

# Strainer PN 25 Y-type, with flanged ends and drain-plug 1/2" in cover



- Materials:** Body: cast steel GP 240GH, Screen: stainless steel 1.4301, Gasket: graphit reinforced
- Connection:** flanged ends DIN
- Test pressure:** 60 bar
- Specials:** with connection for differential gauge in body DN 15 - DN 40 G 1/4" and DN 50 - DN 250 G 1/2"

DN	L	A	Mesh-width*	Weight (kg)	Article No.**
200	600	360	1,32	153,00	20325200GLT


\* Fine screens at all nominal diameters mesh width 0,25 mm, free area 37%

\*\* When ordering with fine screen: Article-Nr. + addition "with F-SIEB"

DN	L1	D1	Fo	KVS1	KVS2	Zet1	Zet2	ø G	ø R	P	D	B
200	290	186	36 %	675,00	570,00	5,50	7,60	260	212	2,0	Ø 345	720

The delivery of the strainer is in accordance to PED 2014/68/EU Point 11 and 12 of the preamble and article 1, clause c as well as article 4, clause 3.  
The picture shown is only a symbolic photo! Subject to technical changes and errors.

## Key for our datasheets

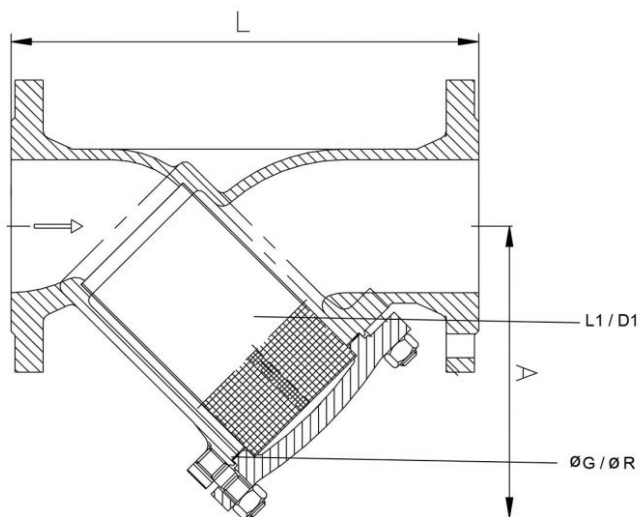

DN	Nominal diameter
L	Face to face dimension (mm)
A	Centre line of pipe to end of cover (mm)
L1	Screen length (mm)
D1	Screen diameter (mm)
Fo	Free screen area standard element (mm)
KVS1	KVS-Value standardscreen (m <sup>3</sup> /h)
KVS2	KVS-Value fine screen (m <sup>3</sup> /h)
Zet1	Zeta-Value standardscreen
Zet2	Zeta-Value fine screen
ø G	Outer-diameter coverflange gasket (mm)
ø R	Inner-diameter coverflange gasket (mm)
P	Thickness coverflange gasket (mm)
D	Coverflange size
B	Distance required to remove screen (mm)