

# Strainer PN 25 Y-type, with flanged ends and drain-plug 1/2" in cover



- Materials:** Body: GS-C 25, Screen: stainless steel 1.4301,  
Gasket: graphit reinforced
- Connection:** flanged ends DIN
- Test pressure:** 60 bar
- Specials:** with magnetit separator

| DN  | L   | A   | Mesh-width* | Weight (kg) | Article No.** |
|-----|-----|-----|-------------|-------------|---------------|
| 200 | 600 | 360 | 1,32        | 153,00      | 2032520003    |

\* Fine screens at all nominal diameters mesh width 0,25 mm, free area 37%


\*\* When ordering with fine screen: Article-Nr. + addition "with F-SIEB"

| DN  | L1  | D1  | Fo   | KVS1   | KVS2   | Zet1 | Zet2 | ø G | ø R | P   | D     | B   |
|-----|-----|-----|------|--------|--------|------|------|-----|-----|-----|-------|-----|
| 200 | 290 | 186 | 36 % | 675,00 | 570,00 | 5,50 | 7,60 | 260 | 212 | 2,0 | Ø 345 | 720 |

The delivery of the strainer is in accordance to PED 2014/68/EU Point 11 and 12 of the preamble and article 1, clause c as well as article 4, clause 3.

The picture shown is only a symbolic photo! Subject to technical changes and errors.

## Key for our datasheets

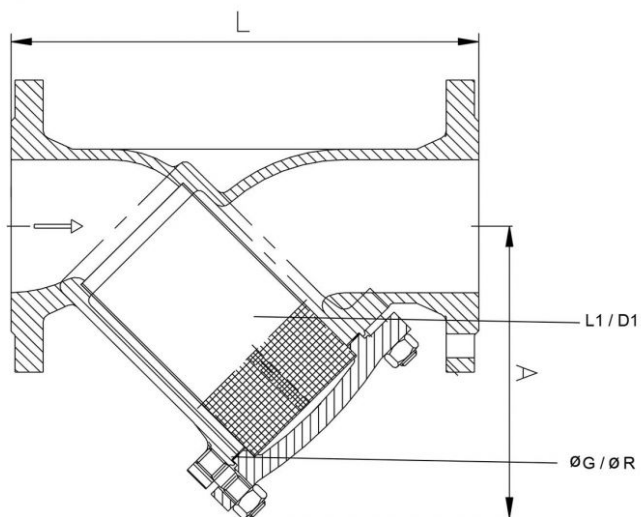

|                 |  |
|-----------------|--|
| DN              | Nominal diameter                             |
| L               | Face to face dimension (mm)                  |
| A               | Centre line of pipe to end of cover (mm)     |
| L1              | Screen length (mm)                           |
| D1              | Screen diameter (mm)                         |
| Fo              | Free screen area standard element (mm)       |
| KVS1            | KVS-Value standardscreen (m <sup>3</sup> /h) |
| KVS2            | KVS-Value fine screen (m <sup>3</sup> /h)    |
| Zet1            | Zeta-Value standardscreen                    |
| Zet2            | Zeta-Value fine screen                       |
| $\varnothing G$ | Outer-diameter coverflange gasket (mm)       |
| $\varnothing R$ | Inner-diameter coverflange gasket (mm)       |
| P               | Thickness coverflange gasket (mm)            |
| D               | Coverflange size                             |
| B               | Distance required to remove screen (mm)      |